




ABLOY®

ABLOY exit for double leaf door (DIN)

Main application is double leaf door with access control on active leaf (from outside) while free exit (handle or panic bar) on both leaves from inside.
 Optionally passive leaf can be released electrically for ventilation in case of fire.

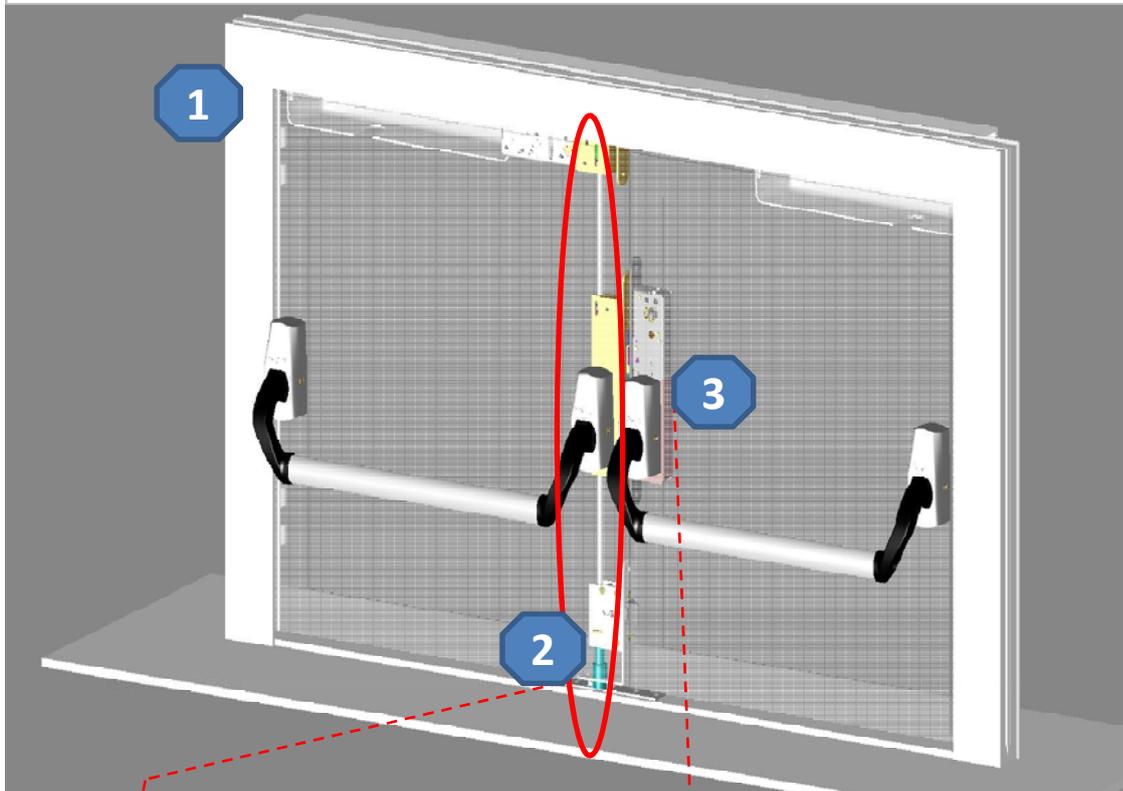

Step by step specification

- 1** Decision based on construction of the door (profile or full leaf metal/wood)
- 2** **Choice of passive leaf set** - electrical in case when ventilation function is needed or mechanical in other cases

passive leaf set	
	full leaf
mechanical	PE925
electrical	PE928

possible combination

- 3** **Selection of active leaf lock**

active leaf lock	
	full leaf
mechanical	PE160
solenoid	PE560
motorlock	PE520

Do not forget about cables cable leads, door closers, door selector (coordinator).

- Choice of active leaf lock:
1. ventilation - motorlock;
 2. access control with pull handle - motorlock
 3. access control with handle outside - solenoid lock
 4. no access control (exit only) - mechanical or microswitch